



PLAN VIEW



FEEDROLL SIDE ELEVATION VIEW

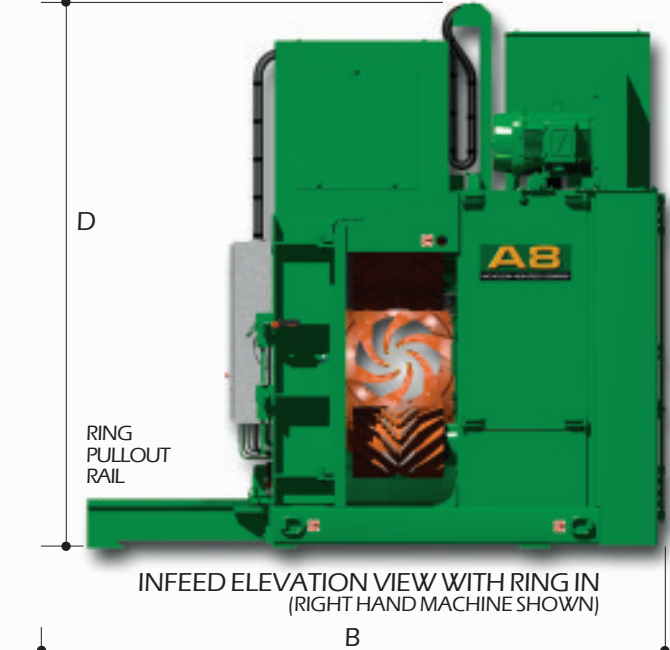

INFEED ELEVATION VIEW WITH RING IN
(RIGHT HAND MACHINE SHOWN)

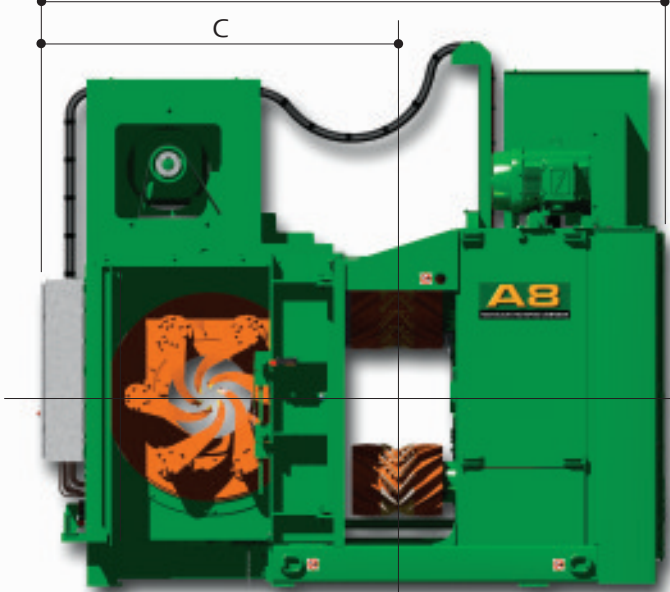

INFEED ELEVATION VIEW WITH RING OUT



GENERAL DIMENSIONS A8 DEBARKER BY RING SIZE					
	17 (43)	22 (56)	27 (69)	31 (79)	35 (89)
A	185.00 (470)	185.00 (470)	194.25 (494)	194.25 (494)	230.25 (585)
B	163.00 (414)	163.00 (414)	184.00 (467)	184.00 (467)	216.06 (549)
C	92.50 (235)	92.50 (235)	108.00 (274)	108.00 (274)	123.56 (314)
D	136.50 (347)	136.50 (347)	155.00 (394)	155.00 (394)	176.50 (448)

DIMENSIONS: INCHES (cm)




EXPERT NICHOLSON SALES SUPPORT NEAR YOU:

NICHOLSON MANUFACTURING LTD. 9896 GALARAN ROAD, P.O. BOX 2128 SIDNEY, BC CANADA V8L 3S6 TEL: 250-656-3131 FAX: 250-656-3111
SEND WORLD WIDE EMAIL TO: forestsales@nmbc.com SEE OUR WEBSITE AT: www.debarking.com

The manufacturer reserves the right to make changes or add improvements at any time without incurring any obligation to make changes on machines manufactured previously.
Actual product may vary from photograph, illustration and description.
File: A8V3 22 Brochure 22Mar2007.p65




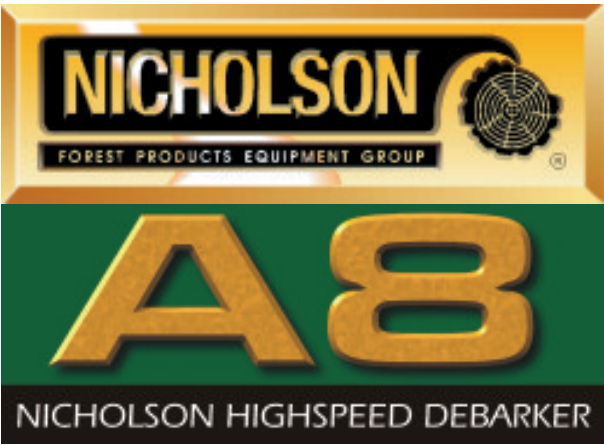

GET HIGHSPEED PRODUCTION NOW, OR HAVE SIGNIFICANT RESERVE CAPACITY FOR YOUR FUTURE PRODUCTION REQUIREMENTS.

THE A8 INCORPORATES SOPHISTICATED DESIGN AND MANUFACTURING TECHNOLOGIES THAT GIVE YOU MORE PERFORMANCE AND RELIABILITY AT LOWER COST!


THE ADVANCED A8 IS QUICK AND EASY TO INSTALL AS A REPLACEMENT FOR EXISTING NICHOLSON A5 AND A7 DEBARKERS.

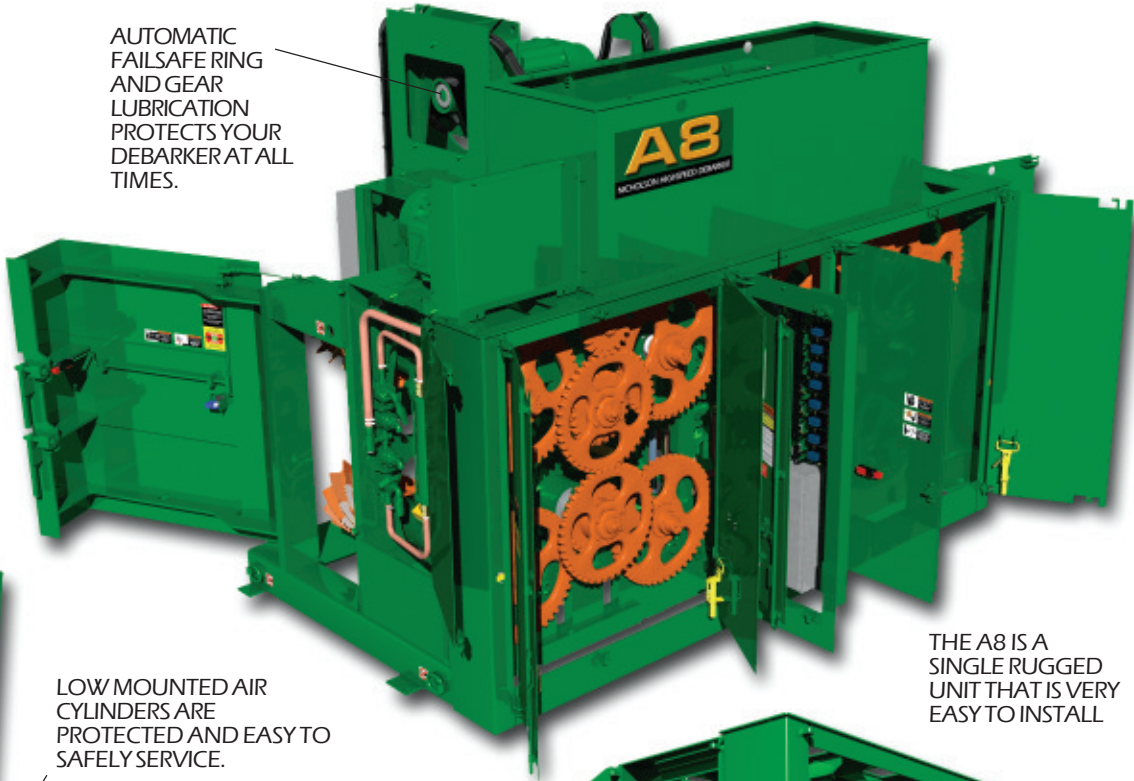

DRIVE COVERS ARE SHOWN REMOVED FOR MAXIMUM ACCESS TO ALL COMPONENTS

AUTOMATIC FAILSAFE RING AND GEAR LUBRICATION PROTECTS YOUR DEBARKER AT ALL TIMES.


THE A8 IS A SINGLE RUGGED UNIT THAT IS VERY EASY TO INSTALL

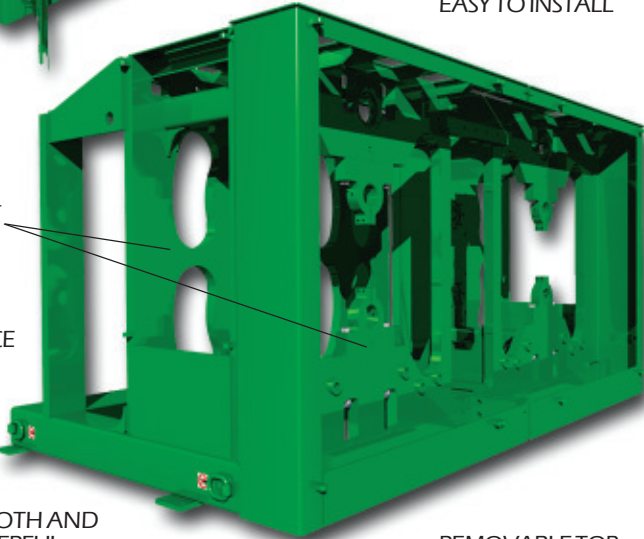

SOLID 3 INCH THICK STEEL NICHOLSON UNIBLOC PERIMETER FRAME IS MAINTENANCE FREE.

SMOOTH AND POWERFUL SINGLE MOTOR BELT DRIVE FOR LOW MAINTENANCE AND ENERGY SAVINGS.

REMOVABLE TOP PANELS FOR FULL ACCESS TO FEEDROLLS, WIRING, PIPING AND FEEDWORKS DRIVE.

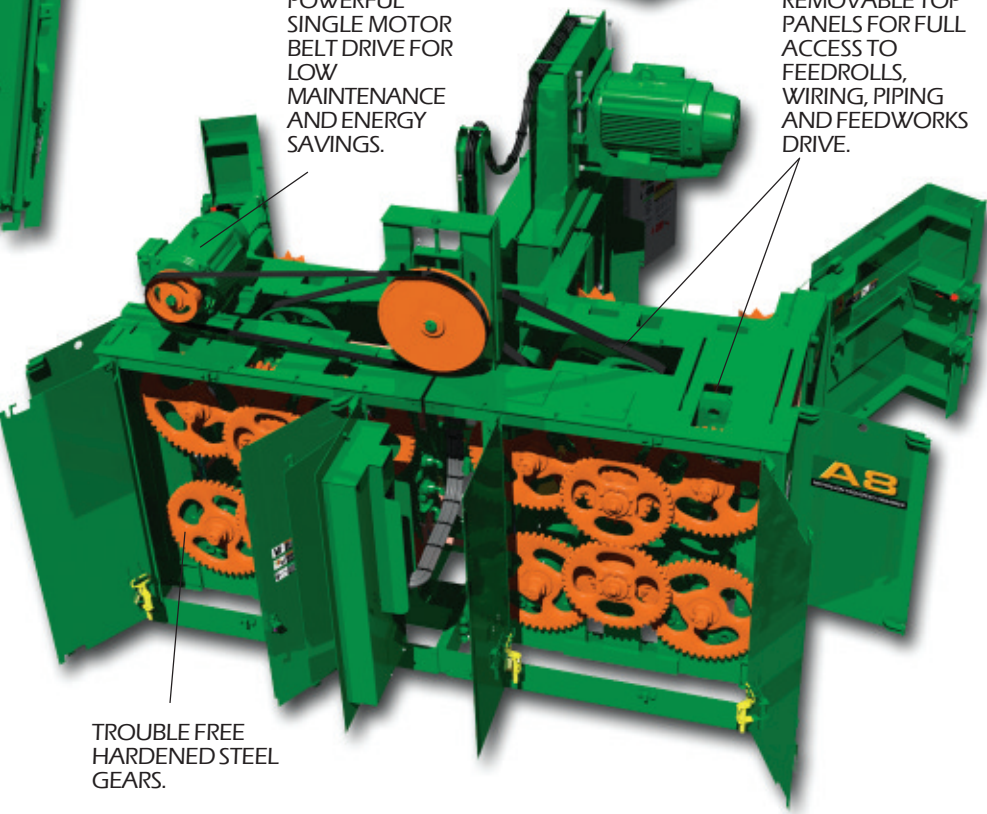

TROUBLE FREE HARDENED STEEL GEARS.

A8 AIR CYLINDERS LIFT ONLY THE LOG AND LOWER FEEDROLLS FOR MAXIMUM SERVICE LIFE.

SINGLE POINT AIR AND CONTROL POWER HOOK-UP SITES

MASSIVE DOORS ARE LOG GUIDES AND OPEN TO PROVIDE FULL WIDTH ACCESS TO THE FEEDROLLS.

PATENTED NICHOLSON FIBERGUARD FEEDROLLS SAVE FIBER AND SIGNIFICANTLY REDUCE MAINTENANCE COSTS.

THE FAST REACTING NICHOLSON AIR SEAL RING SAVES FIBER AND PROVIDES SUPERIOR BARK REMOVAL.

DEBARKER RING ACCESS IS AT A SAFE AND CONVENIENT HEIGHT. COMPLETE ACCESS TO BOTH SIDES OF THE RING AND RING DRIVE ARE PROVIDED.

THE A8 USES ONLY SOLID AND RELIABLE COMPONENTS THAT HAVE BEEN PROVEN IN A WIDE RANGE OF APPLICATIONS WORLD WIDE.

INDIVIDUAL FEEDROLL AND RING AIR PANELS PROVIDE FAST SYSTEM RESPONSE AND ARE EASY TO ADJUST.

THE A8 PROVIDES THE BEST AND SAFEST SERVICE ACCESS OF ANY DEBARKER.

